



IMV VIBRATION
TEST SYSTEMS

Aseries

Air-cooled Vibration Test Systems

A30/SA3HAG

A30/EM3HAG

A

A-series is the “new standard” in vibration testing, with a solid test performance. A-series increases the relative excitation force and has a displacement of 76.2 mmp-p (3 inch stroke) *1 which gives good balance between specification of velocity, acceleration and displacement. It also provides a maximum of 3.5 m/s shock velocity testing, which responds to the demand in lithium battery testing. Rapid creation of a test from a set of pre-defined templates conforming to most international test standards. Simply select the standard required to generate the main test settings.

*1) Only for A30, A45, A65, A74



1. Improvement of performance


Expansion of test cases and responses to high spec. tests allow the A-series to meet a wide range of testing needs.

- Improvement in excitation force
- Standard 76.2 mmp-p displacement
- Expansion in frequency range
- High velocity shock test

2. User friendly and secure

Greater security and functionality with improved energy savings.

Comparison of consumed power per excitation force

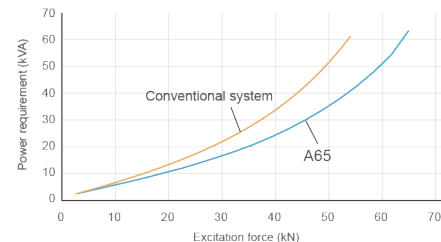

3. User first principle

Intuitive interface guides the operator for easy use.



IMV CORPORATION





IMV VIBRATION
TEST SYSTEMS

A series

Air-cooled Vibration Test Systems

A30/SA3HAG

A30/EM3HAG



System Specification			
System Model		A30/SA3HAG	A30/EM3HAG
Frequency Range (Hz)		0-2,600	0-2,600
Rated Force	Sine (kN)	30	30
	Random (kN rms) *1	30	30
	Shock (kN)	60	60
	High Velocity Shock (kN) *4	-	50
Maximum Acc.	Sine (m/s ²)	900	900
	Random (m/s ² rms)	630	630
	Shock (m/s ²)	1,818	1,818
	High Velocity Shock (m/s ² peak) *4	-	1,515
Maximum Vel.	Sine (m/s)	2.0	2.0
	Shock (m/s peak)	2.5	2.5
	High Velocity Shock (m/s peak) *4	-	3.5
Maximum Disp.	Sine (mmp-p)	76.2	76.2
	High Velocity Shock (mmp-p)	-	76.2
Maximum Travel (mmp-p)		82	82
Maximum Load (kg)		400	400
Power Requirements (kVA) *2		36	36
Breaker Capacity (A) *3		75	75

Vibration Generator (A30)	
Armature Mass (kg)	33
Armature Diameter (φ mm)	290
Armature Resonance (Hz)	1,980
Allowance Eccentric Moment (N·in)	850
Mass (kg)	2,000

Power Amplifier	SA3HAG-A30	EM3HAG-A30
Maximum Output (kVA)	31	
Mass (kg)	520	590

Cooling (VAPE/N 630/N2R)		
Mass (kg)	250	
Cooling Air Flow (m ³ /min)	54	
Environmental Data		
Input Voltage Supply (3 φ, V)	380/400/415/440	
Compressed Air Supply (Mpa)	0.7	
Working Ambient Temperature	Shaker (°C)	0-40
	Amplifier (°C)	0-40

Vibration Generator (A30)

a: W 1,100 mm
b: H 1,048 mm
c: D 840 mm






Table Insert Pattern (unit: mm)




Amplifier (SA3HAG-A30/EM3HAG-A30)

a: W 580 mm
b: H 1,950 mm
c: D 850 mm

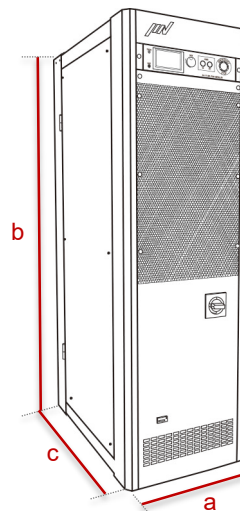

Blower

a: W 1,043 mm
b: H 2,335 mm
c: D 640 mm

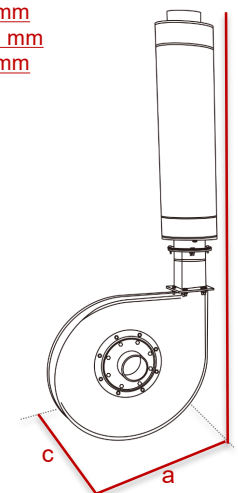

*1 Random force ratings are specified in accordance with ISO5344 conditions. Please contact IMV or your local distributor with specific test requirements..

*2 Power supply: 3-phase 380/400/415/440 V, 50/60 Hz. A transformer is required for other supply voltages.

*3 Breaker capacity for 480 V.

*4 Maximum velocity 4.6 m/s. High velocity restricts maximum Shock force.

*The specification shows the maximum system performance. For long-duration tests, system must be de-rated up to 70%.

Continuous use at maximum levels may cause failure. Please contact IMV if your system operates at more than 70%.

*For random vibration tests, please set the test definition of the peak value of acceleration waveform to operate at less than the maximum acceleration of shock.

*Frequency range values vary according to the sensor and vibration controller.

*Armature mass and acceleration may change when a chamber is added.

IMV CORPORATION

