



IMV VIBRATION  
TEST SYSTEMS  
**Aseries**

# Air-cooled Vibration Test Systems

## A74/EM10HAG



A-series is the “new standard” in vibration testing, with a solid test performance. A-series increases the relative excitation force and has a displacement of 76.2 mmp-p (3 inch stroke) \*1 which gives good balance between specification of velocity, acceleration and displacement. It also provides a maximum of 3.5 m/s shock velocity testing, which responds to the demand in lithium battery testing. Rapid creation of a test from a set of pre-defined templates conforming to most international test standards. Simply select the standard required to generate the main test settings.

\*1) Only for A30, A45, A65, A74



### 1. Improvement of performance

Expansion of test cases and responses to high spec. tests allow the A-series to meet a wide range of testing needs.

- Improvement in excitation force
- Standard 76.2 mmp-p displacement
- Expansion in frequency range
- High velocity shock test


### 2. User friendly and secure

Greater security and functionality with improved energy savings.

### 3. User first principle

Intuitive interface guides the operator for easy use.

Comparison of consumed power per excitation force

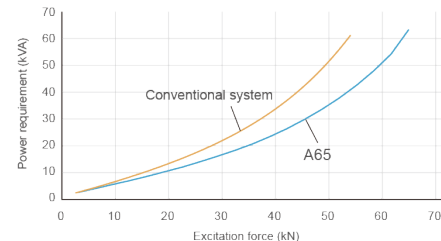

**IMV CORPORATION**





**IMV VIBRATION  
TEST SYSTEMS**  
**Aseries**

# Air-cooled Vibration Test Systems

## A74/EM10HAG



System Specification		
System Model		A74/EM10HAG
Frequency Range (Hz)		0-2,600 <sup>*4</sup>
Rated Force	Sine (kN)	74
	Random (kN rms) <sup>*1</sup>	74
	Shock (kN)	222
	High Velocity Shock (kN) <sup>*5</sup>	170
Maximum Acc.	Sine (m/s <sup>2</sup> )	1,000
	Random (m/s <sup>2</sup> rms)	630
	Shock (m/s <sup>2</sup> )	2,000
	High Velocity Shock (m/s <sup>2</sup> peak) <sup>*5</sup>	2,000
Maximum Vel.	Sine (m/s)	2.0
	Shock (m/s peak)	2.5
	High Velocity Shock (m/s peak) <sup>*5</sup>	3.5
Maximum Disp.	Sine (mmp-p)	76.2
	High Velocity Shock (mmp-p)	76.2
Maximum Travel (mmp-p)		82
Maximum Load (kg)		1,000
Power Requirements (kVA) <sup>*2</sup>		100
Breaker Capacity (A) <sup>*3</sup>		250

Vibration Generator (A74)	
Armature Mass (kg)	74
Armature Diameter (φ mm)	446
Armature Resonance (Hz)	1,770
Allowance Eccentric Moment (N·in)	1,550
Mass (kg)	4,800

Power Amplifier (EM10HAG-A74)	
Maximum Output (kVA)	118
Mass (kg)	2,400

Cooling (VAPE900/N2R)		
Mass (kg)	320	
Cooling Air Flow (m <sup>3</sup> /min)	70	
Environmental Data		
Input Voltage Supply (3φ, V)	380/400/415/440	
Compressed Air Supply (Mpa)	0.7	
Working Ambient Temperature	Shaker (°C)	0-40
	Amplifier (°C)	0-40

Vibration Generator (A74)

a: W 1,310 mm  
b: H 1,253 mm  
c: D 1,040 mm



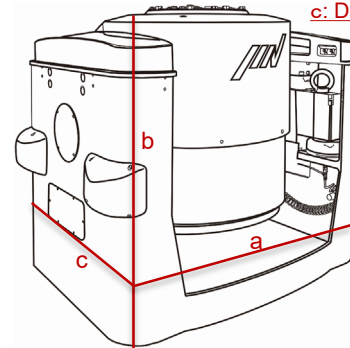


Table Insert Pattern (unit: mm)

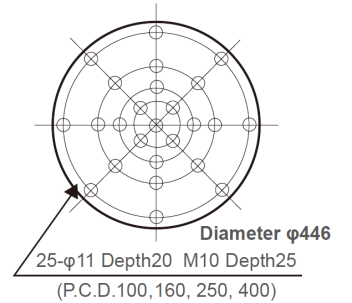


Amplifier

a: W 1,740mm  
b: H 1,950mm  
c: D 850mm

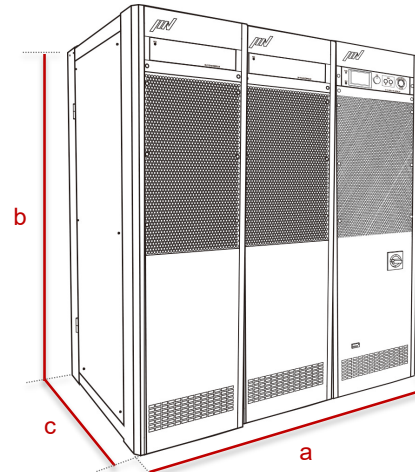

Blower

a: W 1,462 mm  
b: H 2,800 mm  
c: D 930 mm

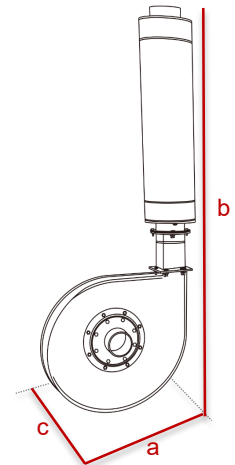

<sup>\*1</sup> Random force ratings are specified in accordance with ISO5344 conditions. Please contact IMV or your local distributor with specific test requirements.  
<sup>\*2</sup> Power supply: 3-phase 380/400/415/440 V, 50/60 Hz. A transformer is required for other supply voltages.  
<sup>\*3</sup> Breaker capacity for 480 V.  
<sup>\*4</sup> Above 4000 Hz, the force rolls-off at a rate of -6 dB/oct.  
<sup>\*5</sup> Maximum velocity 4.6 m/s. High velocity restricts maximum Shock force.  
<sup>\*</sup>The specification shows the maximum system performance. For long-duration tests, system must be de-rated up to 70%. Continuous use at maximum levels may cause failure. Please contact IMV if your system operates at more than 70%.  
<sup>\*</sup>For random vibration tests, please set the test definition of the peak value of acceleration waveform to operate at less than the maximum acceleration of shock.  
<sup>\*</sup>Frequency range values vary according to the sensor and vibration controller.  
<sup>\*</sup>Armature mass and acceleration may change when a chamber is added.

