


## ZoneOne Stability Test Chambers

Light-duty temperature/humidity chambers featuring a large volume and full-view doors

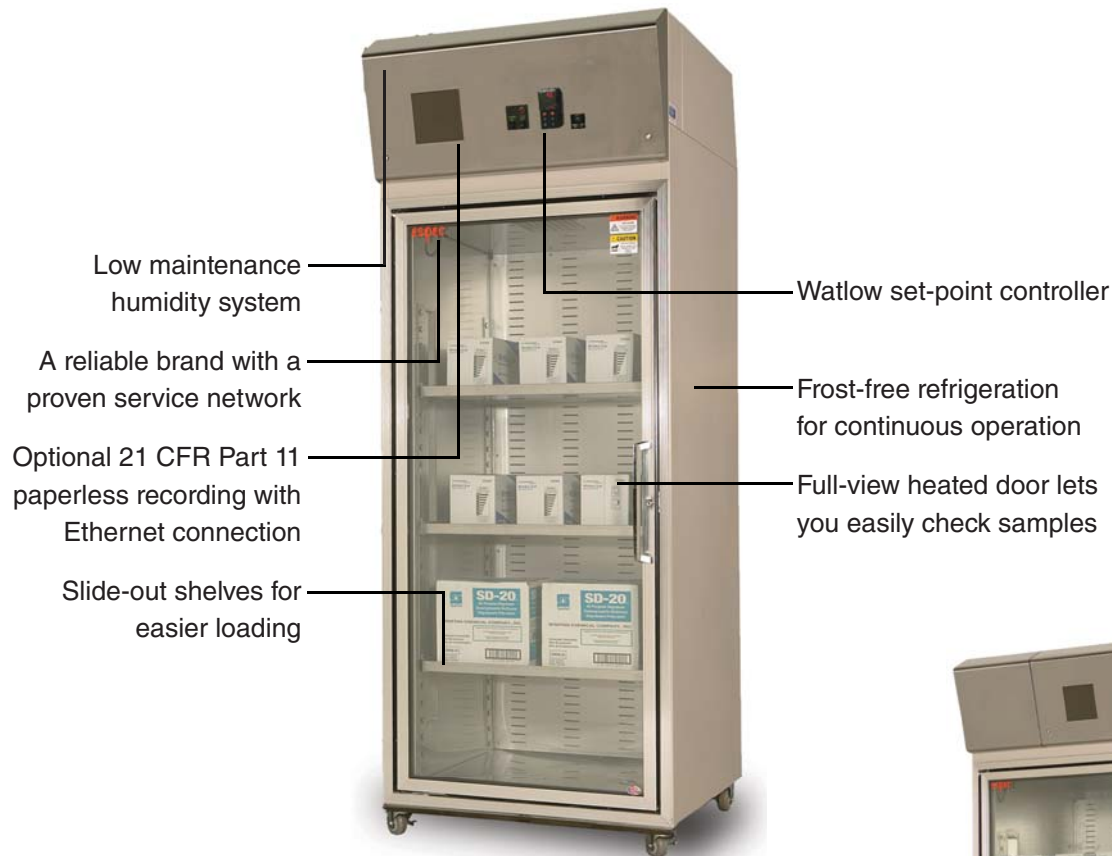


### Features

- Performance meets ICH guidelines for pharmaceutical stability testing
- Two sizes available: 28 or 56 cubic foot volume
- Heated full-view window for easy viewing without condensation problems
- Horizontal airflow for uniform sample exposure
- Includes adjustable solid shelves with lips to protect against spills
- Designed for flush installation on all sides; casters are standard
- One year parts and labor domestic warranty with factory-trained technicians
- IQ OQ PQ certification services available

## ZoneOne Specifications

Model	EZO30-WA (single door)	EZO60-WA (double door)
Interior Volume	28 cu. ft. (800 L)	56 cu. ft. (1,600 L)
Interior Dimensions	27.5" x 27.8" x 63.5" (70 x 71 x 161 cm)	55" x 27.8" x 63.5" (140 x 71 x 161 cm)
Exterior Dimensions	34" x 40" x 91.5" (87 x 102 x 233 cm)	67" x 40" x 91.5" (172 x 102 x 233 cm)
Temperature Range	10 to 65°C (50 to 150°F)	
Temperature Fluctuation	0.25°C (between 20 and 40°C)	
Humidity Range	20 to 90% RH (see chart)	
Humidity Fluctuation	2.0% RH, above 20°C	
Power Required	208/230V, single phase, 60Hz	
Water Required	De-ionized water 1/4" compression fitting	
Gravity Drain	1/2" hose fitting	

### Humidity Control Range

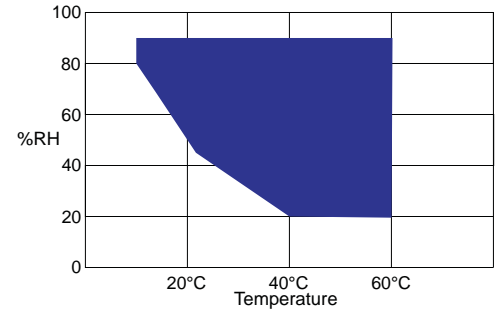

### Controller

- Watlow EZ-ZONE setpoint controller
- Constant mode for stability testing
- Large LED display
- Alarms for out-of-setting conditions (temperature and humidity)
- Redundant overheat protection



### Options Available

- Paperless, strip or circular chart recorders
- Additional shelves (three included for 30 cu. ft., six for 60 cu. ft.)
- Water filter cartridge system
- Water supply tank
- Cable ports for running-in wires:  
1" (25mm) or 2" (50mm) diameter
- Interior light
- Stainless steel exterior
- Solid door in lieu of glass door
- Power cord

### Featured Option: Secure Paperless Recorder

- Secure data storage system complies with 21 CFR Part 11 requirements
- Color LCD display
- Records to memory card
- Ethernet connection for remote access
- Email alerts for recorder alarms

